



FIRESTOP CENTRE


Authorised New Zealand Distributor
Ph (09) 483 4000 www.firestopcentre.co.nz

AGNI-Seal in a Shaftwall (min 41mm) Power, Data & Alarm Cables FRR -/60/60

System ID# FC459

Step-by-step installation instructions:

1. Ensure the aperture is free from dust and debris.
2. Different types of cables to be separated by 20mm.
3. Apply sealant to the full depth of the annular space, 41mm (nominal) deep and finish flush with the wall.

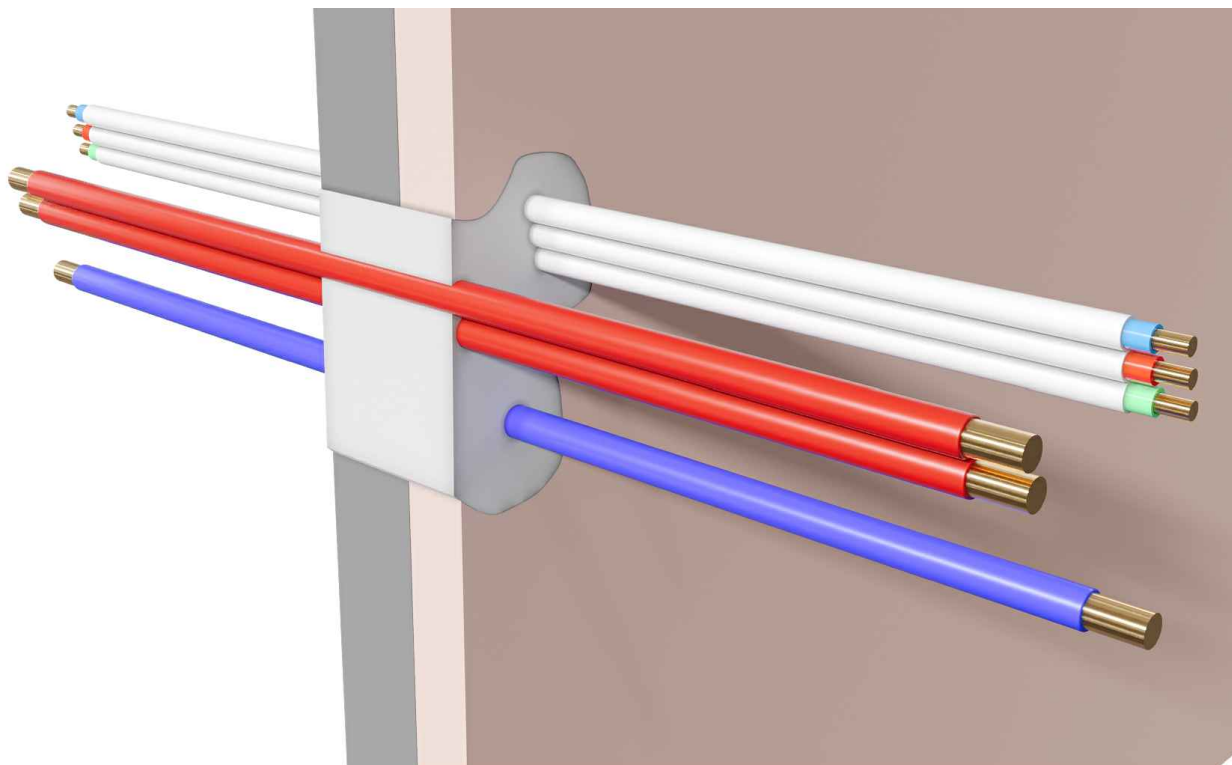

Technical Information

Substrate	• Min. 25mm Shaftliner & 16mm fire-rated plasterboard wall (Shaftwall system)
Service range	2 x Alarm cables + 1 x Data cable + 1 x TPS cable (20mm apart)
Aperture size	Alarm cable - 13.7mm Data cable - 12.9mm TPS cable - 18.5mm
AGNI-Products	AGNI-Seal
Protection installation	From both sides of the wall

Compliance Information

Standards	AS1530.4-2014, AS4072.1-2005
FRR/FRL	-/60/60
Reference	RIRF25006



Agnitek[®]
FIRE RATED TECHNOLOGY

8 Clare St Bayswater
VIC 3153, AUSTRALIA
www.agnitek.com.au

Disclaimer

Agnitek reserves the right to modify product specifications without prior notice due to its ongoing research, development & certification programme. The information in this document is provided in good faith and is intended for guidance purposes only. Any accompanying drawings are solely for illustrative purposes. Since Agnitek cannot oversee installation methods or ensure site conditions, no warranties, expressed or implied, are intended regarding the products' actual performance. We do not accept liability for any loss, damage, or injury from using this information. Please take a look at the test reports displayed on a relevant AGNI-System webpage for all compliance specifics.


Date	21.04.2025
------	------------



FIRESTOP CENTRE

Authorised New Zealand Distributor
Ph (09) 483 4000 www.firestopcentre.co.nz

System ID# FC459

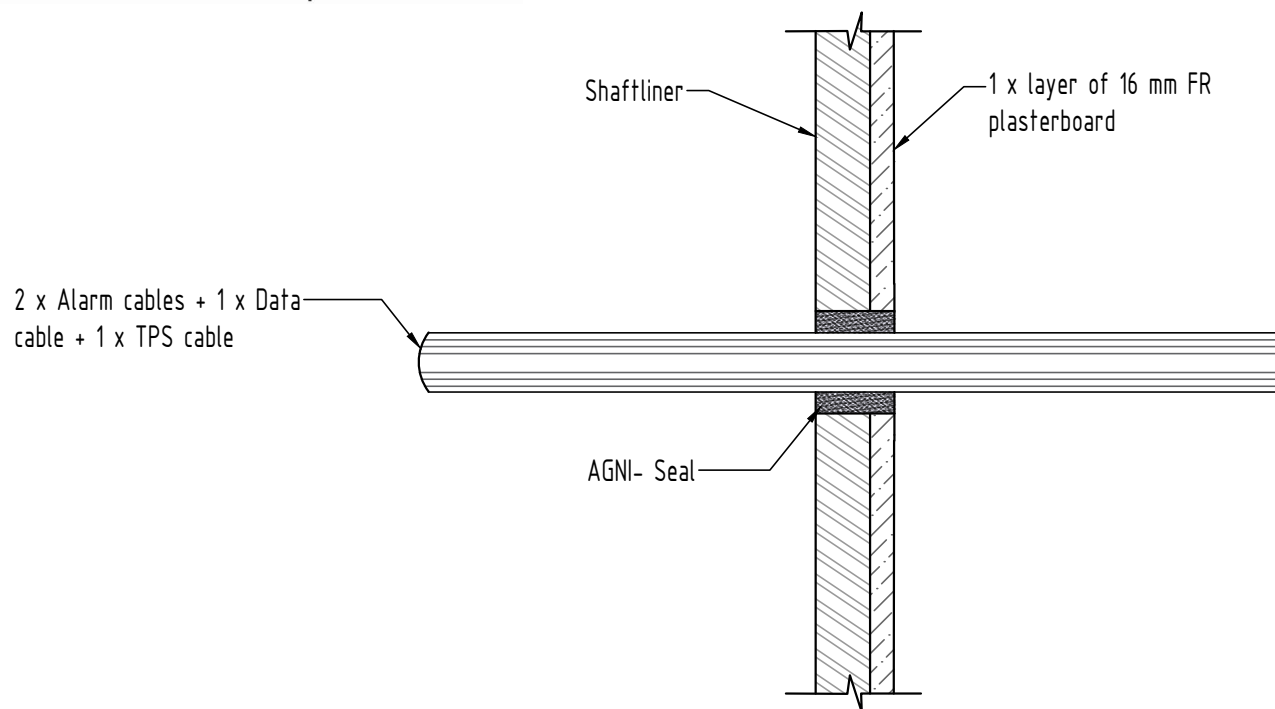

Technical Information

Substrate	<ul style="list-style-type: none"> Min. 25mm Shaftliner & 16mm fire-rated plasterboard wall (Shaftwall system)
Service range	2 x Alarm cables + 1 x Data cable + 1 x TPS cable (20mm apart)
Aperture size	Alarm cable - 13.7mm Data cable - 12.9mm TPS cable - 18.5mm
AGNI-Products	AGNI-Seal
Protection installation	From both sides of the wall

Compliance Information

Standards	AS1530.4-2014, AS4072.1-2005
FRR/FRL	-/60/60
Reference	RIRF25006



Agnitek[®]
FIRE RATED TECHNOLOGY

8 Clare St Bayswater
VIC 3153, AUSTRALIA
www.agnitek.com.au

Disclaimer

Agnitek reserves the right to modify product specifications without prior notice due to its ongoing research, development & certification programme. The information in this document is provided in good faith and is intended for guidance purposes only. Any accompanying drawings are solely for illustrative purposes. Since Agnitek cannot oversee installation methods or ensure site conditions, no warranties, expressed or implied, are intended regarding the products' actual performance. We do not accept liability for any loss, damage, or injury from using this information. Please take a look at the test reports displayed on a relevant AGNI-System webpage for all compliance specifics.

Date 21.04.2025