



# FIRESTOP CENTRE

Authorised New Zealand Distributor  
Ph (09) 483 4000 [www.firestopcentre.co.nz](http://www.firestopcentre.co.nz)


## Protecta FR Putty Cord - PB or Concrete Walls Cable Bundle

### Installation Instructions

- Preparation:** Before installing Protecta® FR Putty Cord, ensure the surface of all service penetrations and surrounding construction is wiped clean, dry, and free from loose contaminants, dust, oils, and grease.
- Positioning:** Place the Putty Cord around the services so that it seals the services to the wall completely.
- Sealing:** Press the Putty Cord into the wall and services with your thumbs to form a fillet or V-shaped joint, ensuring good contact all the way around. Required cone size: 15mm x 15mm
- Compatible Services:** Suitable for use with insulated copper or aluminium conductor cables, fibre optic cables, and communication cables.

NOTE: Blanks up to 15mm diameter may be sealed with a 15mm deep cord of Protecta FR Putty on both sides of the wall FRR -/120/120

Apertures with less than 10mm annular width around services

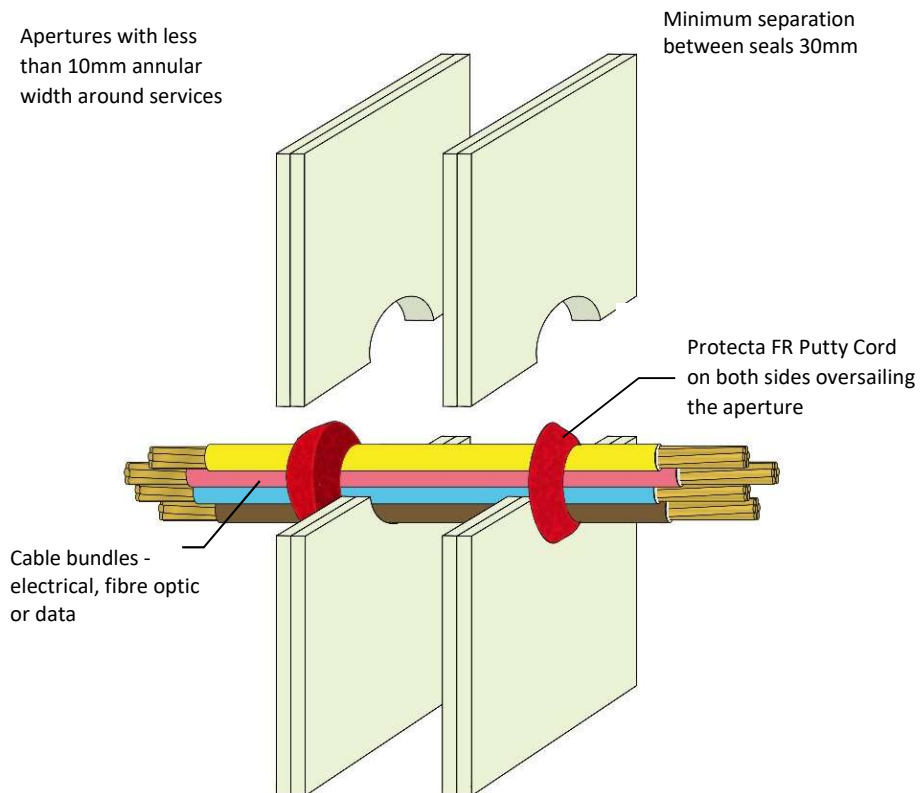

UL Technical Assessment Report  
No. 4791111748-1 Page 15  
AS1530.4-2014 AS4072.1-2005

### System FC349

<b>Products</b>	Protecta FR Putty Cord
<b>Application</b>	Fire stopping of cables in flexible walls
<b>Construction</b>	Minimum wall thickness of 100 mm, with steel or timber studs lined with 2 layers of 13 mm plasterboard on each face, or constructed from concrete

### Fire & Sound Classification

Cable bundles up to 50mm diam:	
Individual cables < 21mm	FRR -/120/120
Individual cables > 21mm	FRR -/60/60
Single cables up to 21mm diam	FRR -/120/120
Single cables up to 80mm diam	FRR -/60/60



# Protecta®

As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Polyseam has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on [www.firestopcentre.co.nz](http://www.firestopcentre.co.nz)

Signed and approved:

Sheet size:	Drawn date & no:
<b>A4</b>	29/5/18 R1.1
Scale:	Drawn by:
<b>NTS</b>	K.B