

The FSC 300 & 200 Inspection Hatch

No Framing, Stopping or Sealants Required.

Description

The Firestop Centre Inspection Hatch is a lightweight (2.6kg) alternative to other hatches. The hatch is designed to simplify the installation process by eliminating expensive and disruptive construction - in other words, fast and simple installation. Lightweight components are combined in a unique system to maintain the integrity of any barrier. No additional finishing to surrounds or the hatch is required as the steel cover plate is powder coated to create a pleasing and unobtrusive finish.

Features

The Firestop Centre Inspection Hatch is designed to give inspection access, whilst eliminating expensive and disruptive construction. The inspection hatch can be successfully used for new installations, interior refits and retrospective requirements in both commercial and domestic constructions and can be installed in vertical or horizontal barriers of all material types. The Hatch can be installed in plasterboard without additional support framing. Once installed no additional finishing to surrounds is required.




Physical Properties

The hatches are fabricated from 16 gauge cold rolled zintex steel frame with a 16 gauge zintex steel cover, providing a lightweight easily installed hatch assembly. The exposed face of the hatch cover has a powdercoated finish eliminating any after installation treatment.

Installation Techniques

Cut a hole in the fire barrier using the frame as a template.

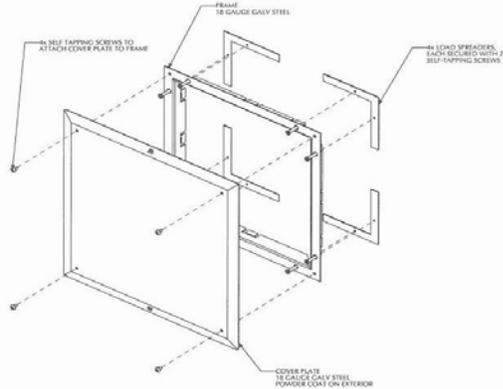

The FSC Inspection Hatch does not require any framing in plasterboard, although existing framing can be used where available.

Place a load spreader at each corner and fix with the supplied screws.

Position the cover plate over the frame and screw the four cover plate screws to the frame.

Finally, cover the screw heads with the plastic covers provided and remove the protective plastic sheet.

Application

The FSC Inspection Hatch is ideal when access is required through a ceiling for inspection or maintenance.

Maintenance

No maintenance should be required when installed in accordance with the technical installation instructions. Once installed, if any section of the hatch is damaged, the damaged section should be removed and replaced. Replacement cover plate screws may be collected from Firestop Centre at no charge.

The information contained in this document is based on available tests of components used in the manufacture of these hatches. This product data sheet does not purport to be a test or to utilise any test results other than those specified in the technical report. The manufacturer warrants the FSC Inspection Hatch will be free from defects in materials for 90 days from the date of purchase.