


Allproof Low Profile Fire Collar
PVC/HDPE Plastic Floor Waste in Concrete
Floor (from 70mm)

Authorised New Zealand Distributor Ph (09) 483 4000 www.firestopcentre.co.nz

INSTALLATION INSTRUCTIONS:

- Ensure substrate around pipe is flat and free from obstructions.
- 2. Open pipe collar and position around pipe.
- 3. Slide tab through slot in pipe collar and fold back 180° to secure.
- Secure pipe collar using M6x25 masonry anchors or M6x4.5 DBZ Wedge Anchors. Do not use fixings which rely on plastic or nylon components for grip.
- Install only from underside on floor penetrations.
- 6. Allproof recommends any thermal or acoustic lagging maintains a 50mm separation to the fire collar.

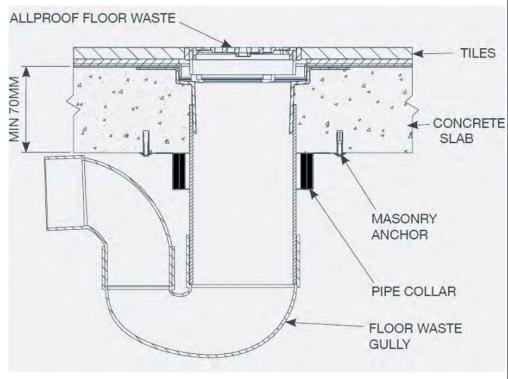



As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Firestop Centre has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:



BRANZ Appraisal 1008 Technical Manual - Plumbing Pg 6 AS1530.4-2014 AS4072.1-2005

System/FPA Register ID# FC629

Products Allproof Low-Profile Fire Collar

Application Fire stopping of floor wastes

in rigid floors

Construction Minimum floor thickness of

70mm and comprise aerated

concrete or concrete

Fire Classification:

PVC Plastic pipe in 70mm slab

80mm diam with hole size up to 92mm

FRR -/120/120

100mm diam with hole size up to 117mm

FRR -/120/-

PVC Plastic Pipe In 120mm floor slab:

50mm diam with hole size up to 67mm

FRR -/180/120

80mm diam with hole size up to 92mm

FRR -/120/120

100mm diam with hole size up to 112mm

FRR -/120/120

PVC Plastic Pipe with Socket in 150mm slab

80mm diam with hole size up to 87mm

FFR -/120/0

HDPE Plastic Pipe in 150mm slab

110mm diam with hole size up to 112mm

FRR - /120/120



Allproof Industries Ltd 17 Bay Park Place Beach Haven, AK 0626

Sheet size:	Drawn date & no:
A4	28/7/21
Scale:	Drawn by:
NTS	G.P