




**Firestop
Centre**
Innovative Firestop Solutions

System FC292

Penetration Detail: Linear Gap Seal -
Horizontal up to 40 mm, Vertical up
to 50 mm fire-stopped with FIRESTOP
Ultra Sealant

Separating Element: Min. 180mm thick
Concrete Wall

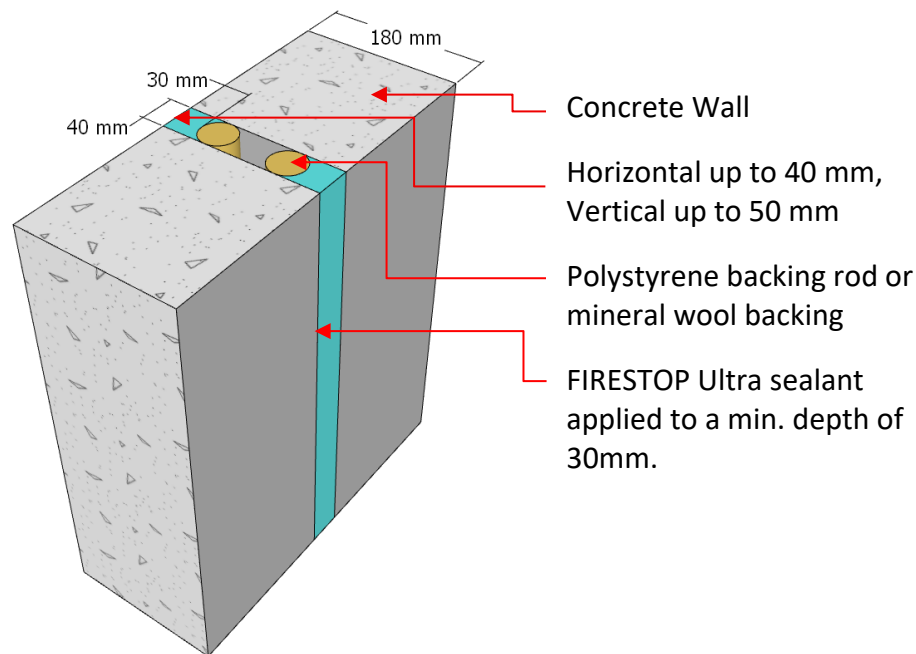

Installation Instructions:

1. Ensure surfaces are free of grease or other contaminants.
2. Insert polystyrene backing rod or mineral wool backing leaving a 30mm recess (nominal).
3. Apply FIRESTOP Ultra sealant to a depth of 30mm both sides flush with concrete face.

Services & Ratings (FRR)

Linear Gap Orientation	Gap Width	Sealant Depth	FRR
Horizontal	40mm	30mm	-/360/360
Vertical	50mm	30mm	-/360/360

- **FIRESTOP Ultra** is suitable for both interior and exterior applications - refer to the *FIRESTOP Ultra UV-Adhesion Report* for details.
- Also tested with a recessed stitch plate covered with fire mortar for vertical linear gaps up to 30mm – see page 14 of *Test Report PF21046* for further information.

Compliance

Report Fire TS Lab Report
RIR210460 1

Pages 4, 12 & 13

Standards AS1530.4-2014 &
AS4072.1-2005

Firestop Centre Technical support:
Tel: +64 9 483 4000
info@firestopcentre.co.nz
www.firestopcentre.co.nz

Drawing Rev: 1.0

Scale: NTS

Disclaimer: Firestop Centre may change product specifications without notice as part of our ongoing development and testing. All information in this document is provided in good faith and for guidance only. All drawings are for illustration purposes only and may not reflect the actual product. Since we cannot control how the product is installed or the conditions on-site, we do not guarantee the product's performance. We also accept no responsibility for any loss, damage, or injury resulting from the use of this information.