

Use of Single and Dual Multicollar Slim

The Multicollar *Slim* can be used in either single or dual applications. When using a dual application the extended Multiclips (Large) must be used. See figure C and D for a schematic representation. The table below shows how much Multiclips are required for a single and dual application.

Ø External pipes ducts, cables or insulation (mm)	Single Multicollar <i>Slim</i> Number of Mulcol® Multiclips	Dual Multicollar <i>Slim</i>	
		First Multicollar <i>Slim</i> (Number Mulcol® Multiclips, A)	Second Multicollar <i>Slim</i> (Number Mulcol® Multiclips, B)
≤ 90	2	1(a)	2
> 90 to < 160	3	1(a)	3
≥ 160 to ≤ 200	4	1(a)	4
> 200 to ≤ 285	5	2	5
> 285 to ≤ 315	6	2	6

(a) Mechanical fixing on the construction is not required.

Figure C

- a: Mulcol® Multiclip
- b: Mulcol® Multiclip Large

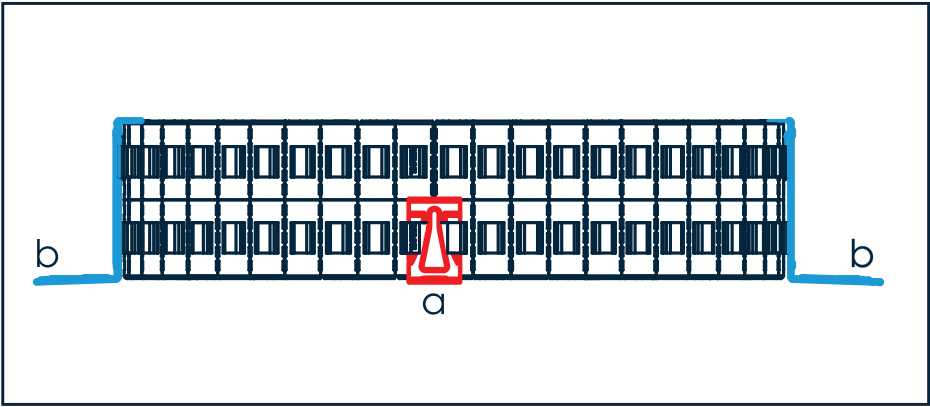


Figure C

- a: Mulcol® Multiclip
- b: Mulcol® Multiclip Large

