


Authorised New Zealand Distributor Ph (09) 483 4000 www.firestopcentre.co.nz

## Protecta FR Board Concrete Wall Blank

Pattress Fit

## **Installation Instructions**

- 1. Before installing Protecta® FR Board ensure that the surface of all service penetrations and surrounding construction is free from all loose contaminants, dust and grease.
- 2. Cut the board to suit the aperture dimensions allowing for 50mm overlap on all sides. All exposed and cut edges of the board must be sealed with Protecta® FR Acrylic.
- 3. All gaps or imperfections in the installed seal must be filled with Protecta® FR Acrylic on both sides.
- 4. Protecta® FR Board can be over-painted with most emulsion or alkyd (gloss) paints.

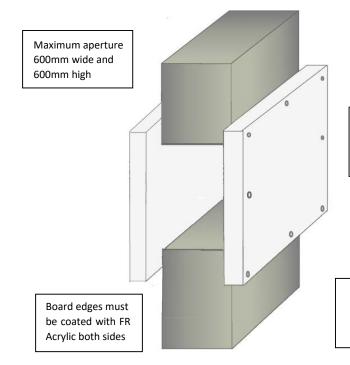

60mm FR Board 2-S oversailing aperture by 50mm on both sides

Fixed with 100mm long screws and penny washers at 350mm centres

FAS 200262 AS1530.4-2014 AS4072.1-2005

As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Polyseam has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:

## warringtonfire

FAS 200262 Page 3 AS1530.4-2014 AS4072.1-2005

## System/FPA Register ID# FC255

**Products** Protecta FR Board

Protecta FR Acrylic

Fire stopping blanks in rigid Application

Construction Minimum wall thickness of 150

> mm and comprise concrete. aerated concrete or masonry, with a density of  $\geq$  650 kg/m<sup>3</sup>

Fire & Sound classification

FRR -/240/180 Blank seal up to 600 x 600mm

Wall thickness down to 75 mm accepted with FRR reduced to FRR of the wall.

Sound reduction (seal only) STC 55



Polyseam Ltd, 15 St Andrews Road, Huddersfield, West Yorkshire, HD1 6SB

Tel: +44 (0) 148 4421036

Email: post.uk@polyseam.com

Sheet size:	Drawn date & no:
A4	20/4/20
Scale:	Drawn by:
NTS	G.P