



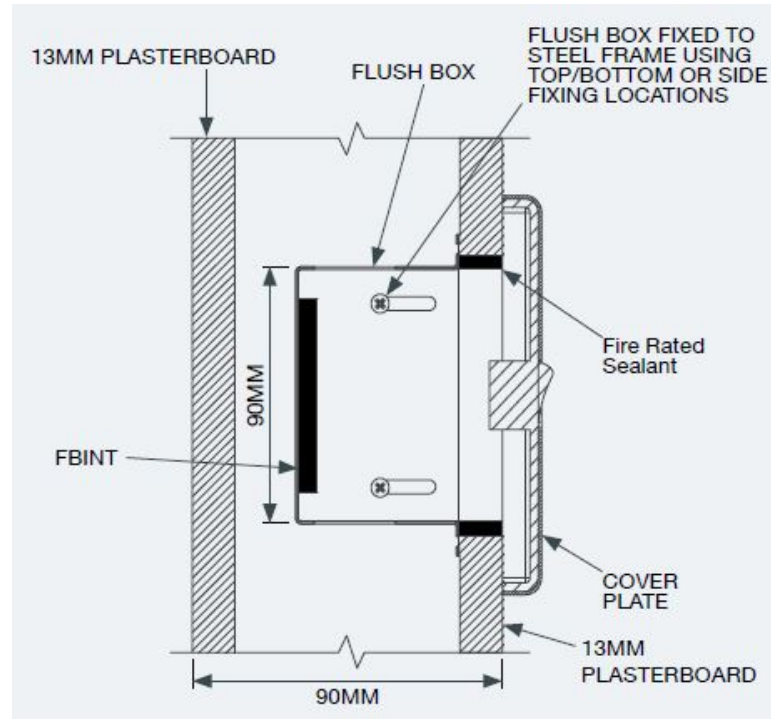

FIRESTOP CENTRE

Authorised New Zealand Distributor
Ph (09) 483 4000 www.firestopcentre.co.nz

Allproof Flush Box Intumescent Pad Single or Double Metal Flush Box Plasterboard Wall from Single Layer 13mm

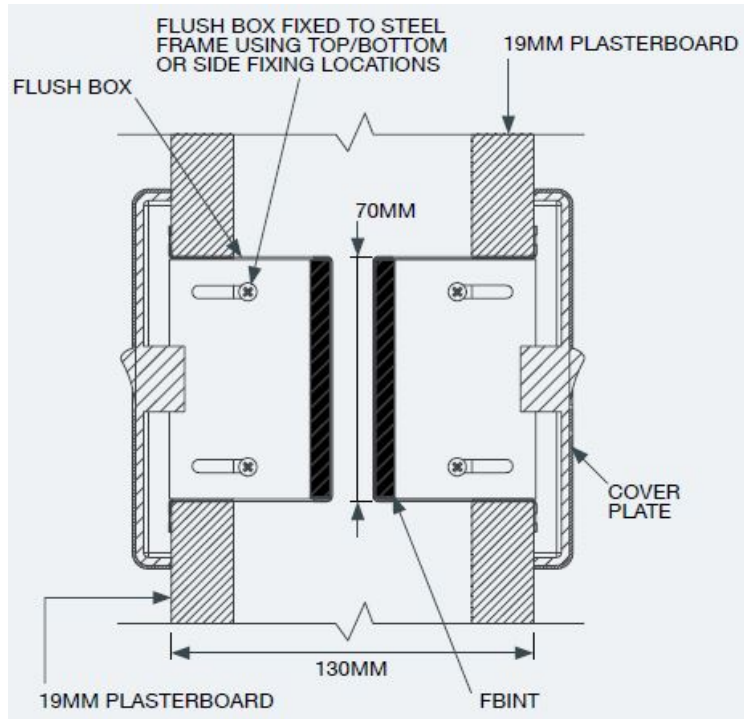

INSTALLATION INSTRUCTIONS:

1. Fix flush box to framing using top/bottom or side fixing locations. Fit against the plasterboard.
2. For single boxes in 13mm walls, allow 5mm annular gap and fill with Allproof MAS310 sealant.
3. Firmly insert Flush Box Pad with adhesive against back of flush box.
4. Finish installation of wiring and fix face plate.



As a part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. Any drawings provided are for illustrative purposes only. As Firestop Centre has no control over the methods or competence of installation and of prevailing site conditions, no warranties, expressed or implied, is intended to be given as to the actual performance of the product mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

For all technical details on the products specified please refer to the technical data sheets that can be found on www.firestopcentre.co.nz

Signed and approved:



BRANZ Appraisal 1008
Technical Manual - Electrical Pg 22
AS1530.4-2014 AS4072.1-2005

System ID# FC630

Products	Allproof Flush Box Intumescent Pad (FBINT)
Application	Fire stopping of single or double metal flush boxes in hollow walls
Construction	Minimum wall thickness 90mm with single layer 13mm standard or fire board each side

Fire Classification:

Single flush box

Apply MAS310 sealant to 5mm annular gap	
In 13mm Standard Board	FRR -/30/30
In 13mm Fireboard	FRR -/60/60

Double flush box

Fit to plasterboard, no sealant required	
In 13mm Standard Board	FRR -/30/30
In 13mm Fireboard	FRR -/60/60

In 19mm or 2 x 13mm Fireboard Wall:

Single flush box or two single flush boxes back to back	FRR -/120/90
---	--------------

ALLPROOF

INDUSTRIES

Allproof Industries Ltd
17 Bay Park Place
Beach Haven, AK 0626

Sheet size:	Drawn date & no:
A4	28/7/21
Scale:	Drawn by:
NTS	G.P